
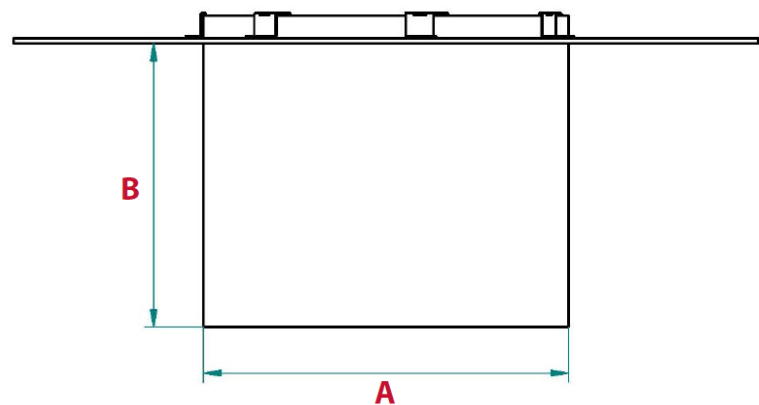


FR flanges from **exodraft** are used to install **exodraft** chimney fans on steel chimneys.

The flanges are made of stainless steel and ensure that the chimney fans have a flat and level installation base. The flange is supplied with four vibration dampers that reduce vibrations and help create a stable base for the chimney fan.

The diameter of the flange spigot is 3 mm smaller than the diameter of the chimney. For example, the diameter of the spigot of an FR1-200 is  $\varnothing$  197 mm, designed to fit into a chimney opening with a  $\varnothing$  200 mm diameter.

The flange range caters for all types of chimney fans and chimneys. Flanges with diameters other than those shown in the table can be made to order.

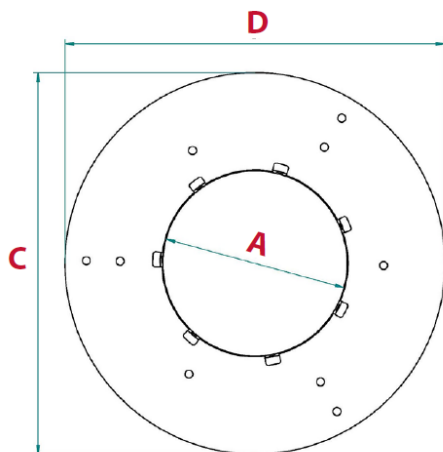

Product no.	Sales no.	Shape	Chimney width (mm)	A (mm)	B (mm)	C (mm)	D (mm)
7100012	FR5100	Round	$\varnothing$ 100	$\varnothing$ 97	113,8	$\varnothing$ 300	$\varnothing$ 300
7100013	FR5125	Round	$\varnothing$ 125	$\varnothing$ 122	113,8	$\varnothing$ 300	$\varnothing$ 300
7100014	FR5150	Round	$\varnothing$ 150	$\varnothing$ 147	113,8	$\varnothing$ 300	$\varnothing$ 300

Unit of measure: mm

Hekon art. : EXH-FR5100150